


| Art.No.   | article name                                               |
|-----------|------------------------------------------------------------|
| 133815003 | HK07 - KombiQuick, 2fold, with shutter, colour: anthrazite |

HK07 - KombiQuick, 2fold, with shutter, colour: anthrazite

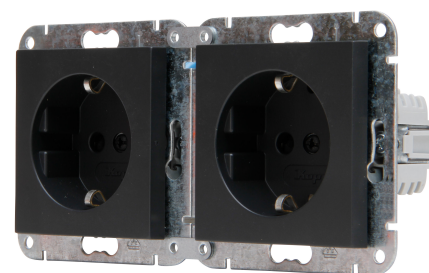

| Technical data                          |                                    | 133815003 |
|-----------------------------------------|------------------------------------|-----------|
| Connection type                         | Push-in clamp                      |           |
| With signal lamp                        | no                                 |           |
| With enhanced contact protection        | yes                                |           |
| Frequency                               | 50 - 50                            |           |
| Label space/information surface         | no                                 |           |
| Eject-mechanism                         | no                                 |           |
| Material                                | Plastic                            |           |
| Rated fault current                     | 0.00 A                             |           |
| Type of fastening                       | Screw mounting                     |           |
| Impact strength                         | IK00                               |           |
| Transparent                             | no                                 |           |
| With miniature fuse                     | no                                 |           |
| With loop through function              | yes                                |           |
| With function lighting                  | no                                 |           |
| With orientation lighting               | no                                 |           |
| Number of modules (module system)       | 3                                  |           |
| Number of active pins (round)           | 0                                  |           |
| Number of active pins (flat)            | 3                                  |           |
| Min. depth of built-in installation box | 32.0 mm                            |           |
| Compatible with Apple HomeKit           | no                                 |           |
| Compatible with Google Assistant        | no                                 |           |
| Compatible with Amazon Alexa            | no                                 |           |
| Metallic colour                         | no                                 |           |
| Nominal current                         | 16.00 A                            |           |
| Nominal voltage                         | 250 V                              |           |
| Mounting method                         | EV000383 - Flush-mounted (plaster) |           |
| Colour                                  | anthracite                         |           |
| Model                                   | Socket outlet CEE 7/3 (type F)     |           |
| Halogen free                            | yes                                |           |
| Lockable                                | no                                 |           |
| With hinged lid                         | no                                 |           |
| Surface protection                      | Lacquered                          |           |
| Number of phases                        | 1                                  |           |
| With on/off switch                      | no                                 |           |
| For heavy conditions (according to VDE) | no                                 |           |
| Rotated central insert                  | no                                 |           |

Technische Beschreibungen, Abbildungen und Leistungsangaben stellen keine zugesagten Eigenschaften dar, sondern sind nur unverbindliche Informationen. Änderungen aufgrund technischen Fortschritts, Normänderungen, veränderter Fertigungsverfahren oder Konstruktionsverbesserungen bleiben ausdrücklich vorbehalten. Stand: 12.09.2025

| Technical data                           |                         | 133815003 |
|------------------------------------------|-------------------------|-----------|
| Over voltage protection                  | no                      |           |
| Fault current protection                 | no                      |           |
| Insulated mounting                       | no                      |           |
| RAL-number (similar)                     | 7024                    |           |
| Width of device                          | 216.0 mm                |           |
| Height of device                         | 72.0 mm                 |           |
| Depth of device                          | 41.1 mm                 |           |
| Number of socket outlets switchable      | 1                       |           |
| IFTTT support available                  | no                      |           |
| Concurrently switching neutral conductor | no                      |           |
| Special power supply                     | No special power supply |           |
| Material quality                         | Thermoplastic           |           |
| Surface finishing                        | Matt                    |           |
| Imprint/indication                       | None                    |           |
| Suitable for degree of protection        | IP20                    |           |
| Anti-bacterial treatment                 | no                      |           |
| With built-in bluetooth speaker          | nein                    |           |
| Number of ports USB-A                    | 0                       |           |
| Number of ports USB-C                    | 0                       |           |
| Max. current rating of USB power supply  | 0.00 A                  |           |
| With Wi-Fi signal repeater               | nein                    |           |
| Colour of switch operator                | sonstige                |           |
| Protective contact                       | Earthing clips          |           |
| Device diameter                          | 216.00 mm               |           |
| Concurrently switching neutral conductor | 0                       |           |
| Number of loop throughs                  | 1                       |           |