


| Art.No.   | article name   |
|-----------|--|
| 140105092 | Cable lead, grounding-type plug, stripped wire ends, colour: black |

Cable lead, grounding-type plug, stripped wire ends, cable H05VV-F 3x1mm<sup>2</sup>, 10A, 250V~, 2m, colour: black

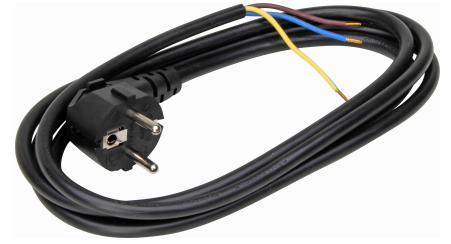

| Technical data   | 140105092                                |
|--|--|
| Nominal cross section conductor                                      | 1.00 mm <sup>2</sup>                     |
| Frequency  | 50 50 Hz                                 |
| Length mm  | 2000.0 mm                                |
| Spiralized cable   | no                                       |
| Nominal voltage  | 230,00 230,00 V                          |
| Connector system system-oriented                                     | no                                       |
| Nominal current  | 10.00 A                                  |
| Number of cores  | 3  |
| Oil resistant according to EN IEC 60811-404                          | no                                       |
| With protective conductor  | yes                                      |
| Degree of protection (IP)  | IP20                                     |
| With cord switch   | no                                       |
| Colour outer sheath  | Black                                    |
| Material outer sheath  | Polyvinyl chloride (PVC)                 |
| Reaction-to-fire according to EN 13501-6: Class                      | None                                     |
| Reaction-to-fire according to EN 13501-6: Smoke production           | None                                     |
| Reaction-to-fire according to EN 13501-6: Flaming droplets/particles | None                                     |
| Reaction-to-fire according to EN 13501-6: Acidity                    | None                                     |
| Connection 1   | Protective contact plug CEE 7/4 (type F) |
| Connection 2   | Cable end sleeve                         |
| Cable entry connection 1   | abgewinkelt                              |
| Connection type according to IEC 60320, connection 1                 | sonstige                                 |
| Cable entry connection 2   | abgewinkelt                              |
| Connection type according to IEC 60320, connection 2                 | sonstige                                 |