


Art.No.	article name
191600005	Impulse relay, for installation in distribution boxes

Impulse relay, 20A, 250V~, for installation in distribution boxes

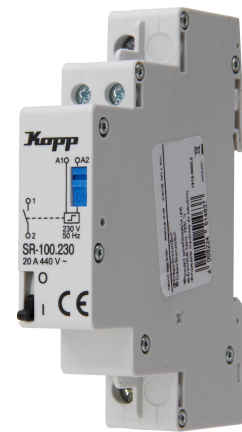

Technical data	191600005
Suitable for manual operation	yes
Mounting method	DIN rail
Built-in depth	65.0 mm
Width in number of modular spacings	1.0
Max. switching current (cos phi = 0.6)	20 A
Max. incandescent lamp load	4400 W
Max. load fluorescent lamp	4400 VA
Rated switch current	20.00 A
Number of contacts as normally closed contact	0
Number of contacts as normally open contact	1
Number of contacts as change-over contact	0
Type of control voltage 1	AC
Type of control voltage 2	AC
Voltage type of supply voltage	AC
Supply voltage	230 230 V
Function	Electronic switch
Control voltage 1	230 230 V
Control voltage 2	0 0 V
Frequency control voltage 1	50 50 Hz
Frequency control voltage 2	0 0 Hz
Max. load fluorescent lamp (Duo circuit)	0 VA
Max. load fluorescent lamp (parallel compensated)	0 VA