Art.No.	article name
392203003	Switch box 3-way, flush mounted, 212x70x41mm, black, IP20

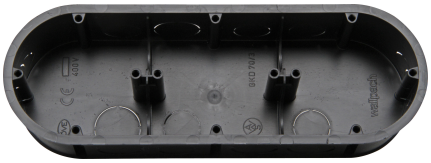

Switch box 3-way, flush mounted, 212x70x41mm, black, IP20, alignable, with coupling system for aligning in standard
distance of 71mm and adjustable fixing of outlet devices, mounting screw spacing 60mm

Technical data	*392203003*
Shape	EV000396 - Oval
Internal depth	40.0 mm
Length	0.2 mm
Sealable	no
Material	Plastic
With screening	no
With screws	No
Inlet from the rear	yes
Pipe locking	no
Number of poles of the clamp	0
Provided with revolving ring	no
Housing feed-through by seal membrane	no
Housing feed-through by nozzle	no
Housing feed-through by step membrane	no
Pipe locking optional	no
Number of included spouts	0
Transparent cover	no
Mounting method	Flush mounted
Colour	Black
Width	70.0 mm
Halogen free	yes
Surface protection	Untreated
Connectable	yes
Luminaire hook mounting	no
Housing feed-through by break-out opening	yes
Air tight	no
Degree of protection (IP)	IP20
Equipped with	None
Construction type	Built-in installation box (device box)
Circuit integrity	None
Cover model	None
Mounting switching equipment	Screw or spread out
For tube diameter	16/19 mm
Special application	None

Technische Beschreibungen, Abbildungen und Leistungsangaben stellen keine zugesagten Eigenschaften dar, sondern sind nur unverbindliche Informationen. Änderungen aufgrund technischen Fortschritts, Normänderungen, veränderter Fertigungsverfahren oder Konstruktionverbesserungen bleiben ausdrücklich vorbehalten. Stand: *10.08.2026*

Technical data	*392203003*
Nozzle	None
Depth	41.0 - 41.0 mm
Number of inlets	10
For number of electric fittings	3
Clamp position fixed	mo
Number of non-adjustable device fixing lugs	0
Number of adjustable device fixing lugs	0
Mit Trennwand	no
Compliant with BS 4662	no

Technische Beschreibungen, Abbildungen und Leistungsangaben stellen keine zugesagten Eigenschaften dar, sondern sind nur unverbindliche Informationen. Änderungen aufgrund technischen Fortschritts, Normänderungen, veränderter Fertigungsverfahren oder Konstruktionverbesserungen bleiben ausdrücklich vorbehalten. Stand: *10.08.2026*