


Art.No.	article name
809500187	Dimmer push/change over (phase control)

Push/change over dimmer socket for light bulbs and 230V~ halogen lights, as well as low voltage halogen lights with conventional transformers, 40-400W/VA, 230V~, 50Hz

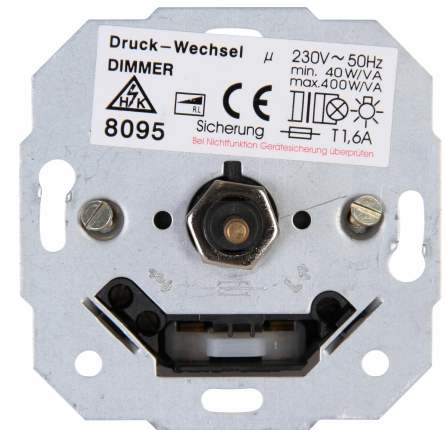

Technical data	809500187
Frequency	50 - 60
Material	Plastic
Type of fastening	Mounting with claw and screw
Impact strength	IK00
Nominal voltage	230 - 230
Transparent	no
Number of modules (module system)	1
Dimming phase cut-off	no
Dimming phase cut-on	yes
Nominal power inductive load	40 - 400
Compatible with Apple HomeKit	no
Compatible with Google Assistant	no
Compatible with Amazon Alexa	no
Max. switching power LED	0 W
Mounting method	EV000383 - Flush-mounted (plaster)
Assembly arrangement	Basic element
Method of operation	Turn/push button
Halogen free	yes
Light value memory	no
Substation input	no
Serial dimmer	no
Applicable with movement sensor	no
Applicable with transmission button	no
Applicable with infrared button	no
Applicable with presence indicator	no
Applicable with button	no
Applicable with time switch/timer	no
Core cross section	1.0 - 2.5
IFTTT support available	no
Material quality	Thermoplastic
Type of load	Inductive load
Surface finishing	Glossy
Suitable for degree of protection	IP20