


Art.No.	article name
---------	--------------

842800008	Push-change over LED-dimmer, (phase control), LED 3-35W
-----------	---

Push-change over LED-dimmer (phase control), LED 3-35W, RL 7-110W/VA, 230V~, 50-60Hz

Technical data	842800008
Connection type	Screwed terminal
Frequency	50 60 Hz
Material	Plastic
Type of fastening	Mounting with claw and screw
Impact strength	IK00
Nominal voltage	230,00 230,00 V
Transparent	no
Number of modules (module system)	1
Dimming phase cut-off	no
Dimming phase cut-on	yes
Nominal power inductive load	7 110 VA
Compatible with Apple HomeKit	no
Compatible with Google Assistant	no
Compatible with Amazon Alexa	no
Max. switching power LED	35 W
Mounting method	EV000383 - Flush-mounted (plaster)
Assembly arrangement	Basic element
Method of operation	Turn/push button
Colour	steel
Halogen free	yes
Surface protection	Untreated
Light value memory	no
Substation input	no
RAL-number (similar)	9022
Serial dimmer	no
Applicable with movement sensor	no
Applicable with transmission button	no
Applicable with infrared button	no
Applicable with presence indicator	no
Applicable with button	no
Applicable with time switch/timer	no
Core cross section	1,0 2,5 mm <sup>2</sup>
IFTTT support available	no
App control via Bluetooth	no
Material quality	Thermoplastic

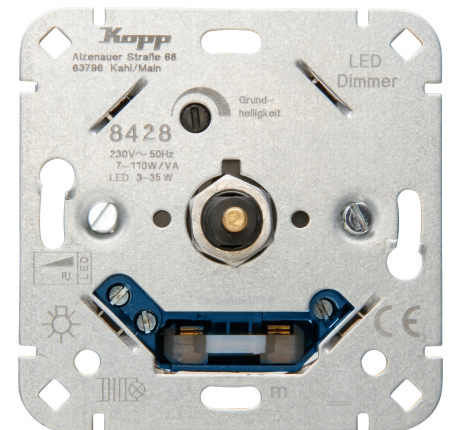

Technical data		842800008
Type of load	Inductive load	
Surface finishing	Glossy	
Suitable for degree of protection (IP)	IP20	