


Art.No. article name

844400008 Changeover switch LED dimmer, 100W/RL

Changeover switch LED dimmer, for incandescent and 230V halogen lamps, dimmable LEDs as well as for low-voltage halogen lamps with conventional transformers, adjustable basic brightness, shaft 4mm with soft locking, phase control, LED 3-100W/VA, with fixing nut and shaft adapter

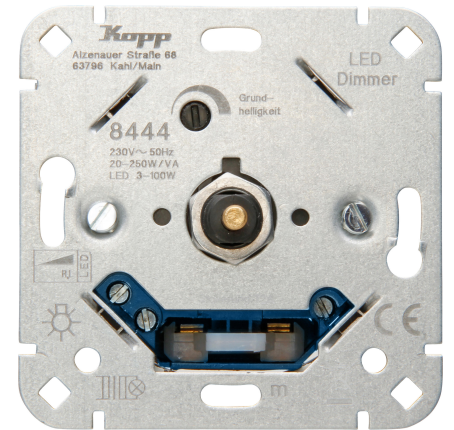

Technical data	844400008
Connection type	Screwed terminal
Frequency	50 60 Hz
Material	Plastic
Type of fastening	Mounting with claw and screw
Impact strength	IK00
Nominal voltage	230,00 230,00 V
Transparent	no
Number of modules (module system)	1
Dimming phase cut-off	no
Dimming phase cut-on	yes
Nominal power inductive load	20 250 VA
Compatible with Apple HomeKit	no
Compatible with Google Assistant	no
Compatible with Amazon Alexa	no
Max. switching power LED	100 W
Mounting method	EV000383 - Flush-mounted (plaster)
Assembly arrangement	Basic element
Method of operation	Turn/push button
Colour	steel
Halogen free	yes
Surface protection	Untreated
Light value memory	no
Substation input	no
RAL-number (similar)	9022
Serial dimmer	no
Applicable with movement sensor	no
Applicable with transmission button	no
Applicable with infrared button	no
Applicable with presence indicator	no
Applicable with button	no
Applicable with time switch/timer	no
Core cross section	1,0 2,5 mm ²
IFTTT support available	no
App control via Bluetooth	no

Technische Beschreibungen, Abbildungen und Leistungsangaben stellen keine zugesagten Eigenschaften dar, sondern sind nur unverbindliche Informationen. Änderungen aufgrund technischen Fortschritts, Normänderungen, veränderter Fertigungsverfahren oder Konstruktionsverbesserungen bleiben ausdrücklich vorbehalten. Stand: 27.03.2024

Technical data		844400008
Material quality	Thermoplastic	
Type of load	Inductive load	
Surface finishing	Glossy	
Suitable for degree of protection (IP)	IP20	