


Art.No.	article name
431240008	Kopp mono half cell single-glass photovoltaic module, with 108 monocrystalline/PERC half cells, STC power: 405Wp, black anodized aluminum frame

Kopp mono half cell single-glass photovoltaic module, with 108 monocrystalline/PERC half cells, STC power: 405Wp, connector plug: QC4, cable length 1200mm each, 30mm black anodized aluminum frame

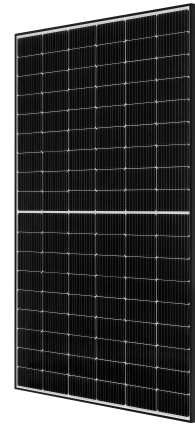

Technical data	431240008
Height	30.0 mm
Length mm	1700.0 mm
Operating temperature	-40 85 °C
With connection cable	yes
Width	1134.0 mm
Weight	21.500 kg
Cable length	1.2 m
Number of cells	108
MPP power by STC	405 Wp
Max. system voltage	1500 V
MPP-voltage	31 V
Open circuit voltage	37 V
MPP-current	12.98 A
Short-circuit current	13.87 A
Power tolerance	0 3 %
Module efficiency factor (STC)	21 %
Temperature coefficient Pmpp	0 %/K
Temperature coefficient Uoc	0 %/K
Temperature coefficient Isc	0 %/K
With frame	yes
Colour frame	Black
Number of bypass diodes	3
Reverse current load	25.00 A
Suitable for vertical/overhead glazing	yes
Glass with anti-reflection coating	no
Colour backsheet	white
Colour cells	schwarz
Cell material	Mono crystalline